



HIGH-REACH CLIPPER




EDGE® HIGH-REACH CLIPPER

Easily remove branches along fence rows with the EDGE high-reach clipper; available as standard-duty and heavy-duty. Both models feature a 6-foot reach and a rotating cutting head with powerful jaws to make a smooth cut on hardwoods up to 9" (229) in diameter, even at ground level.

OPERATIONAL BASICS

The EDGE standard-duty high-reach clipper features a 100-degree rotating cutting head and an in-cab electronic control box. The heavy-duty model features a robust design with a 110-degree rotating cutting head with a wireless remote control. Both models come complete with hoses and flat face couplers. **(Heavy-duty model shown below)**

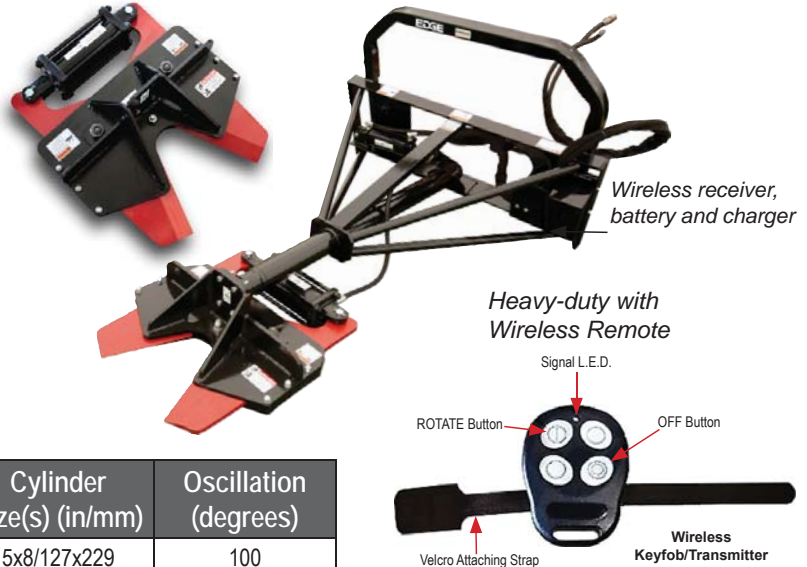

SPECIFICATIONS

Model	Weight (lbs/kg)	Reach (in/mm)	Max. Tree Size (in/mm)	Cylinder Size(s) (in/mm)	Oscillation (degrees)
HRC6	765/347	72/1829	9/229	5x8/127x229	100
HRC6HD	826/375	72/1829	9/229	5x8/127x229	110

FEATURES

- Cut hardwoods up to 9" in diameter, even at ground level
- Cutting head rotates requiring less repositioning
- Self-centering T-1 tempered steel blades
- Greasable hardened pivot bushings

Machine Compatibility Gehl / Mustang	Radial Skid Loaders						Vertical Skid Loaders			Track Loaders			Articulated Loaders			
	3640E/ 2026	R135/ 1350R	R150/ 1500R	R165/ 1650R	R190/ 1900R	R220/ 2200R	R260/ 2600R	V270/ 2700V	V330/ 3300V	V400/ 4000V	RT175/ 1750RT	RT210/ 2100RT	RT250/ 2500RT	340	540	650/ 608
*High Reach Clipper				◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆

*Note: Machine compatibility is based on operating capacity of the machine and the weight of the attachment